


F Absolute®

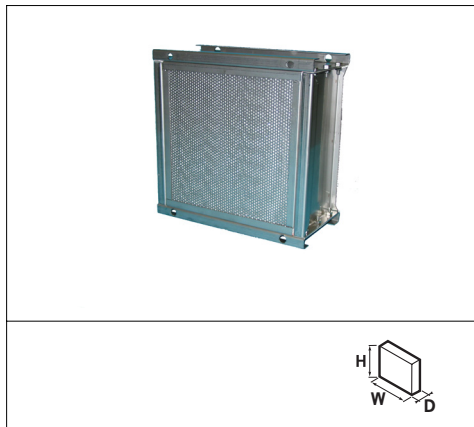

Advantages

- High temperature Absolute for Class 100 oven validation to 750° F (398° C)
- Available in efficiencies of 95% or 99.97% at 0.3µ

Description: High temperature HEPA grade filter with corrugated aluminum separators, ceramic sealant stainless steel enclosing frame and foil-wrapped fiberglass and/or ceramic gasket.

Typical applications: High temperature ovens in pharmaceuticals and clean process manufacturing.

Efficiency: 95% or 99.97% at 0.3µ.

Media: Microfine glass media formed into pleats separated by corrugated aluminum separators with hemmed edges.

Recommended final pressure drop: Recommended final pressure drop is 2.0" w.g., or consult factory.

Temperature: Maximum continuous operating temperature of 750° F (400° C).

Ratings: Tested in accordance with IEST Recommended Practice for Testing HEPA Filters. UL 900.

See Literature 1812 for more details.

Model Number	Efficiency	IEST Type	Nominal Size (inches)	Airflow Capacity (cfm)	Initial Resistance (inches w.g.)	Media Area (sq. ft.)	Shipping Weight (lbs.)
01FS-12Z12Z12-2D-3-E-A-2D-0/00	99.97% @ 0.3 Micron	A	12 x 12 x 11.50	210	1.0	41.0	20.0
01FS-23F11F12-2D-3-E-A-2D-0/00	99.97% @ 0.3 Micron	A	23.375 x 11.375 x 11.50	440	1.0	79.0	27.0
01FS-24Z12Z12-2D-3-E-A-2D-0/00	99.97% @ 0.3 Micron	A	24 x 12 x 11.50	480	1.0	88.0	28.0
01FS-11F23F12-2D-3-E-A-2D-0/00	99.97% @ 0.3 Micron	A	11.375 x 23.375 x 11.50	440	1.0	79.0	27.0
01FS-12Z24Z12-2D-3-E-A-2D-0/00	99.97% @ 0.3 Micron	A	12 x 24 x 11.50	460	1.0	88.0	28.0
01FS-23F23F12-2D-3-E-A-2D-0/00	99.97% @ 0.3 Micron	A	23.375 x 23.375 x 11.50	980	1.0	174.5	41.0
01FS-24Z24Z12-2D-3-E-A-2D-0/00	99.97% @ 0.3 Micron	A	24 x 24 x 11.50	1040	1.0	186.0	42.0
07FS-12Z12Z12-2D-3-E-A-2D-0/00	95% @ 0.3 Micron		12 x 12 x 11.50	190	0.50	43.8	20.0
07FS-23F11F12-2D-3-E-A-2D-0/00	95% @ 0.3 Micron		23.38 x 11.38 x 11.50	400	0.50	85.5	27.5
07FS-24Z12Z12-2D-3-E-A-2D-0/00	95% @ 0.3 Micron		24 x 12 x 11.50	440	0.50	94.5	28.5
07FS-11F23F12-2D-3-E-A-2D-0/00	95% @ 0.3 Micron		11.38 x 23.38 x 11.50	400	0.50	85.5	27.5
07FS-12Z24Z12-2D-3-E-A-2D-0/00	95% @ 0.3 Micron		12 x 24 x 11.50	440	0.50	94.5	28.5
07FS-23F23F12-2D-3-E-A-2D-0/00	95% @ 0.3 Micron		23.38 x 23.38 x 11.50	940	0.50	190.0	41.5
07F-24Z24Z12-2D-3-E-A-2D-0/00	95% @ 0.3 Micron		24 x 24 x 11.50	1040	0.50	199.0	42.5

As part of our program for continuous improvement, Camfil reserves the right to change specifications without notice. 2018-10-12