


CamContain™ PB Prefilter Housing

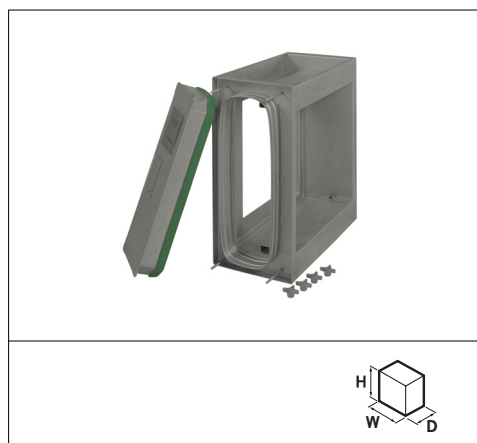

Advantages

- Accepts 2", 4" or 6" ASHRAE grade prefilters to extend the life of Absolute® or HEGA filters
- PB Series 212 allows the installation of a 2" prefilter and a 12" secondary filter

Typical applications: Single or two-stage filter housing designed for mating with Absolute® or HEGA bag-in/bag-out housings. Housing includes a bagging flange for use with a containment bag to facilitate safe filter change by service personnel.

Construction: 14-gauge and 11-gauge T304 and 316 stainless steel.

Filters: 2", 4" or 6" prefilters, or a 2" prefilter and a 12" deep secondary filter of ASHRAE grade efficiency.

Additional data: Information shown herein for quick reference purposes only. Application specific data is required by the factory before model selection can be accomplished.

Consult factory or Literature 3403 for more information.

Housing Size (H x W)	Prefilter Depth (inches)	Height (inches)	Width (inches)	Depth (inches)	Shipping Weight (lbs)
½ x ½	2, 4, or 6	18	15	14	85
½ x 1		18	27		110
1 x 1		30	27		130
1 x 2		30	51		190
1 x 3		30	75		245
2 x 1		60	27		230
2 x 2		60	51		330
2 x 3		60	75		425
3 x 1		90	27		335
3 x 2		90	51		470
3 x 3		90	75		605
4 x 1		120	27		435
4 x 2		120	51		610
4 x 3		120	75		785

Housing Size (H x W)	Prefilter Depth (inches)	Secondary Filter Depth (inches)	Height (inches)	Width (inches)	Depth (inches)	Shipping Weight (lbs)
½ x ½	2	12	18	15	26	125
½ x 1			18	27		160
1 x 1			30	27		195
1 x 2			30	51		295
1 x 3			30	75		385
2 x 1			60	27		345
2 x 2			60	51		515
2 x 3			60	75		670
3 x 1			90	27		495
3 x 2			90	51		740
3 x 3			90	75		955
4 x 1			120	27		645
4 x 2			120	51		960
4 x 3			120	75		1240